

PRODUCT DATA SHEET

Standing: 2021-07-21

LAUDA ECO REJ 1225 G

Calibration thermostat 230 V; 50 Hz

Part Number: L002848

Features

- Calibration thermostatic bath with latest microprocessor technology and integrated cooling system
- Coloured TFT display for simultaneous indication of actual & set values and graphic illustration of the temperature profile
- User friendly menu navigation in plain language
- Easy input via cursor and soft keys. Additional Tmax key for overtemperature protection
- Fully electronic continuous controller with PID action
- Safety class III for operation with flammable and non-flammable liquids. Over-temperature cut-out adjustable via menu
- Vario pump with six adjustable performance levels
- Easy control of the flow rate between internal and external circulation during operation without contact with the bath
- USB interface as standard
- Upgradeable with an interface module (analogue module, contact module, RS 232/485 module, Profibus, Ethernet-USB module)
- Upgradeable with Pt 100/LiBus module for external control and remote control via Command console
- Programmer with 150 temperature/time segments that can be separated into 5 programs
- 2-chamber construction for constant level in the thermostating chamber
- Vertical adjustment of the overflow height of the thermostating chamber
- Bath vessel made from stainless steel with drain valve
- Condenser cooling Air
- Utilizes natural refrigerants



Reserve technical changes



Working temperature min.
-25 °C



Working temperature max.
200 °C

PRODUCT DATA SHEET

Standing: 2021-07-21

LAUDA ECO REJ 1225 G

Calibration thermostat 230 V; 50 Hz

Part Number: L002848

Technical Features

| | |
|----------------------------|----------------------------------------------------|
| Working temperature range | -25 ... 200 °C |
| Ambient temperature range | 5 ... 40 °C |
| Heater power max. | 2.6 kW |
| Power consumption max. | 2.9 kW |
| Power consumption | 13 A |
| Bath volume min. / max. | 9.3 / 12.0 L |
| Size of bath (ØxH) | 150 x 200 mm |
| Overall dimensions (WxDxH) | 250 x 435 x 624 mm |
| Power supply | 230 V; 50 Hz |
| Power plug | Power cord with angled plug (CEE7/7) |
| Refrigerant stage 1 | R-290 (GWP 3); 0.033 kg; 0.0 t CO ₂ -eq |

| Temperature | Pump stage | Heat transfer liquid | Cooling Capacity 50 Hz |
|-------------|------------|----------------------|------------------------|
| 20 °C | 2 | Ethanol | 0.3 kW |
| 0 °C | 2 | Ethanol | 0.24 kW |
| -20 °C | 2 | Ethanol | 0.09 kW |
| -25 °C | 2 | Ethanol | 0.04 kW |

Standard accessories

- 2 screw caps, 2 closing plugs


PRODUCT DATA SHEET

Standing: 2021-07-21

LAUDA ECO REJ 1225 G

Calibration thermostat 230 V; 50 Hz

Part Number: L002848

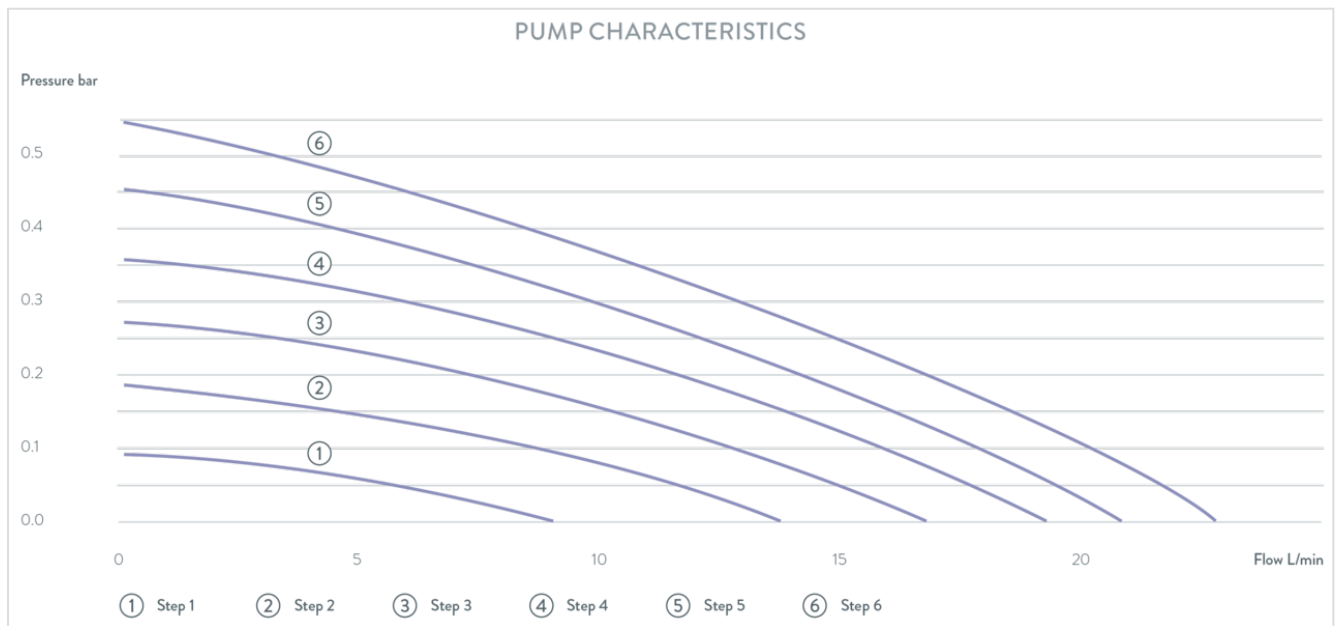

Reserve technical changes